
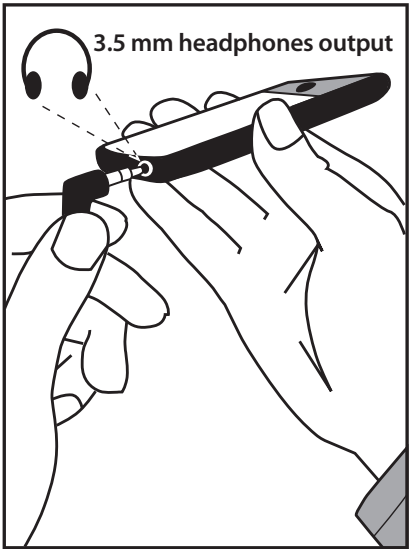
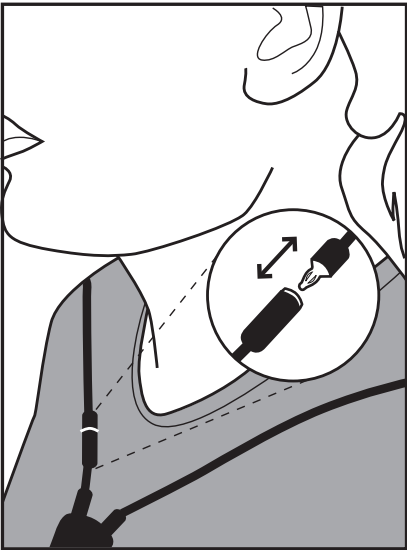
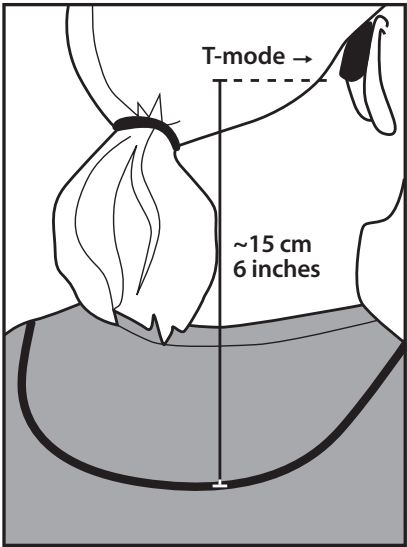


Bellman Neckloop

BE9159

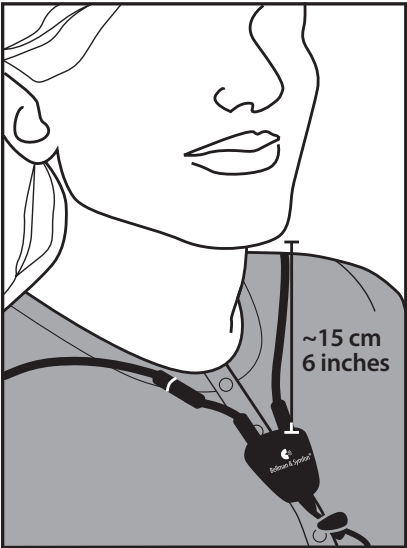

Technical Specifications

Neckloop diameter:	22 cm / 9 inches
Weight:	60 g / 1.6 oz
Cable length:	90 cm / 3 ft
Connectors:	3.5 mm tele plug (break-away connector on loop cable)
Load impedance:	$2 \times 5 \Omega$
Magnetic output:	1500 mA/m at 15 cm / 6 inches distance (2 x 50 mW input signal)



European Office
Bellman & Symfon Europe AB
Södra Långebergsgatan 30
421 32 Västra Frölunda
Sweden
Phone +46 31 68 28 20
Fax +46 31 68 28 90
E-mail info@bellman.se
www.bellman.com

Asia Pacific Office
Bellman & Symfon Asia Ltd.
1115-16, Main Tower, GD Int'l Hotel
339 Huanshi Dong Rd
Guangzhou, China, 510095
Phone +86 20 8318 2950
Fax +86 20 8333 5528
E-mail info.cn@bellman.com
www.bellman.cn

Distributor:

Seniorentechnik-Martin.de
Martin Kommunikationstechnik
Bockhorster Landweg 30a
33775 Versmold
Tel. 05423/4734-0
Fax.05423/473420

eMail: info@seniorentechnik-martin.de
Homepage: www.seniorentechnikmartin.de
Shop: www.Seniorentechnik-Martin.de